


BLOCKS

KT* SINGLE BMM

- Galvanised.

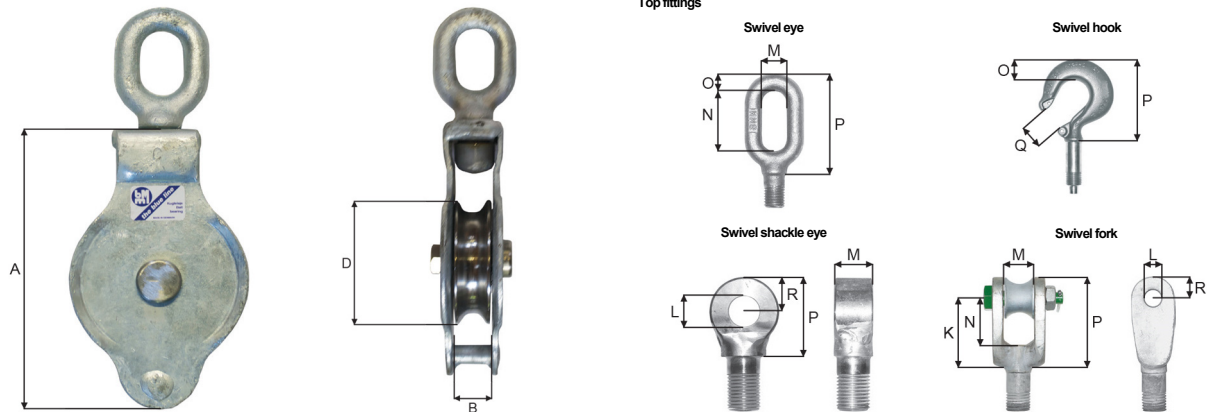

Stock code	Working Load Limit (ton)	Maximum load on head fitting	Test load (ton)	Dimensions (mm)			Becket ø (extra charge) (mm)	Maximum wire (mm)	Weight (kg)
				A	B	C			
KT1	1.0	2.0	4.0	163	22	80	16	16	1.7
KT2	2.0	4.0	8.0	195	24	110	22	18	3.1
KT3	3.0	6.0	12.0	257	28	150	31	20	6.4
KT4	4.0	8.0	16.0	330	35	185	40	22	11.1
KT6	6.0	12.0	24.0	365	42	210	40	24	17.0

Top fittings

Stock code	Swivel eye				Swivel hook			Swivel shackle eye				Swivel fork						
	M (mm)	N (mm)	O (mm)	P (mm)	O (mm)	P (mm)	Q (mm)	L (mm)	M (mm)	R (mm)	P (mm)	K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)	
KT1	25	38	13	65	20	82	25	-	-	-	-	-	-	-	-	-	-	
KT2	23	55	16	94	25	94	28	-	-	-	-	-	-	-	-	-	-	
KT3	26	66	20	110	30	105	30	-	-	-	-	-	-	-	-	-	-	
KT4	35	68	23	134	38	132	38	29	42	35	93	104	23	40	65	30	134	
KT6	40	90	26	153	46	170	46	33	46	42	104	104	23	40	65	30	134	

Blocks must be ordered with one of the following:

1 Ball bearing; KT1, KT2 sealed ball bearings; KT3, KT4, KT6 greaseable ball bearings.

0 Bronze bushing; All bronze bushing are greaseable.

On order add number, e.g. KT2-1.

And one of the following:

E Swivel eye.

K Swivel hook. If the block is used with hook as suspension, the WLL is reduced with 50%.

F Swivel fork, KT4, KT6.

S Swivel shackle eye, KT4, KT6.

G Galvanised is the standard finish.

On order add letter, e.g. KT2-1EG.

Against extra charge all blocks are available with:

B Becket.

C Tested with certificate.

H Flame hardened sheave.

On order add letter, e.g. KT2-1EGC.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.