




BLOCKS

KT*N SINGLE BMM

- Galvanised.
- Nylon sheave.

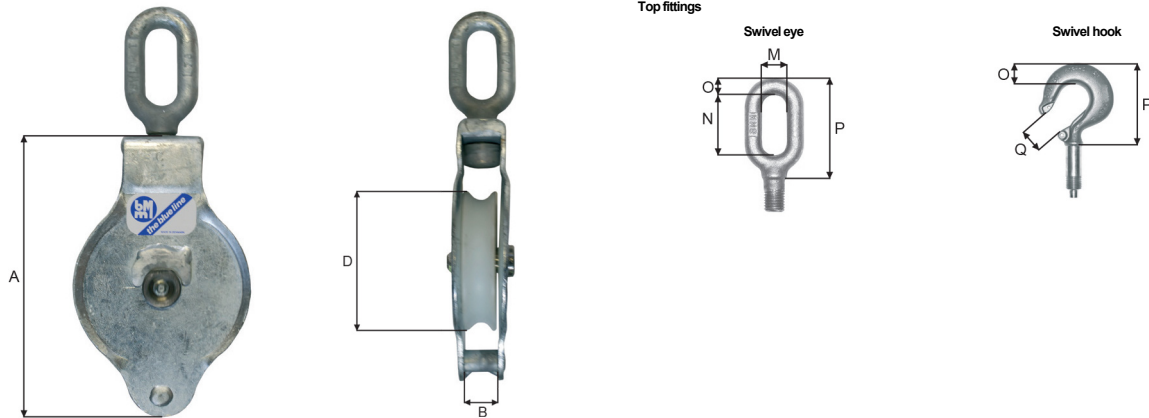

Stock code	Working Load Limit (ton)	Dimensions (mm)			Becket ø (mm)	Maximum wire (mm)	Weight (kg)
		A	B	D			
KT1-N	1.0	163	22	80	16	16	1.0
KT2-N	2.0	195	24	110	22	18	2.0
KT3-N	3.0	257	28	150	31	20	4.0

Top fittings							
Stock code	Swivel eye				Swivel hook		
	M (mm)	N (mm)	O (mm)	P (mm)	O (mm)	P (mm)	Q (mm)
KT1-N	25	38	13	65	20	82	25
KT2-N	23	55	16	94	25	94	28
KT3-N	26	66	20	110	30	105	30

Blocks must be ordered with one of the following:

- E** Swivel eye.
 - K** Swivel hook. If the block is used with hook as suspension, the WLL is reduced with 50%.
 - G** Galvanised is the standard finish.
- On order add letter, e.g. KT1-NEG.

Against extra charge all blocks are available with:

- B** Becket.
 - C** Tested with certificate.
- On order add letter, e.g. KT1-NEGC.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.