




TACKLE BLOCKS

KT* TACKLE BMM

- Galvanised.

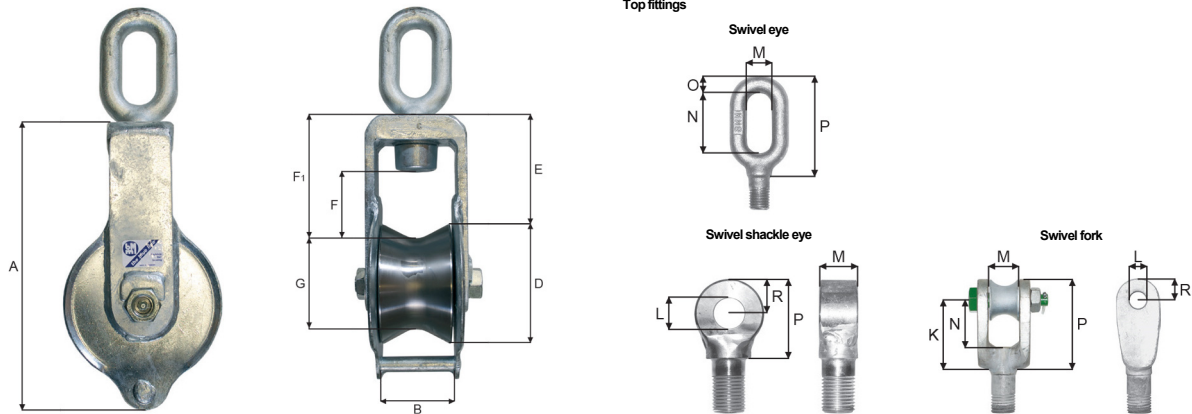

Stock code	Working Load Limit (ton)	Maximum load on head fitting (ton)	Test load (ton)	Dimensions (mm)							Maximum wire (mm)	Weight (kg)
				A	B	D	E	F	F ₁	G		
KT110	3.0	6.0	12.0	270	85	110	150	85	128	70	28	9.0
KT150	5.0	10.0	20.0	320	85	150	155	85	130	110	28	17.0
KT215	8.0	16.0	32.0	415	100	215	215	100	145	170	28	36.0
KT150/180	5.0	10.0	20.0	385	180	150	150	90	140	110	30	32.0

Top fittings

Stock code	Swivel eye				Swivel fork				Swivel shackle eye					
	M (mm)	N (mm)	O (mm)	P (mm)	K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)	L (mm)	M (mm)	R (mm)	P (mm)
KT110	33	82	24	134	104	23	40	65	30	134	26	35	35	93
KT150	40	95	28	153	104	23	40	65	30	134	29	42	40	100
KT215	45	86	32	181	140	29	52	84	35	175	36	50	45	115
KT150/180	40	95	28	153										

Blocks must be ordered with one of the following:

1 Ball bearing; KT1, KT2 sealed ball bearings; KT3, KT4, KT6 greaseable ball bearings.

0 Bronze bushing; All bronze bushing are greaseable.

On order add number, e.g. KT150-1.

And one of the following:

E Swivel eye.

F Swivel fork.

S Swivel shackle eye.

G Galvanised is the standard finish.

On order add letter, e.g. KT150-1EG.

Against extra charge all blocks are available with:

C Tested with certificate.

H Flame hardened sheave.

On order add letter, e.g. KT150-1EGC.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.