




SNATCH BLOCKS

KS* SINGLE BMM

- Galvanised.

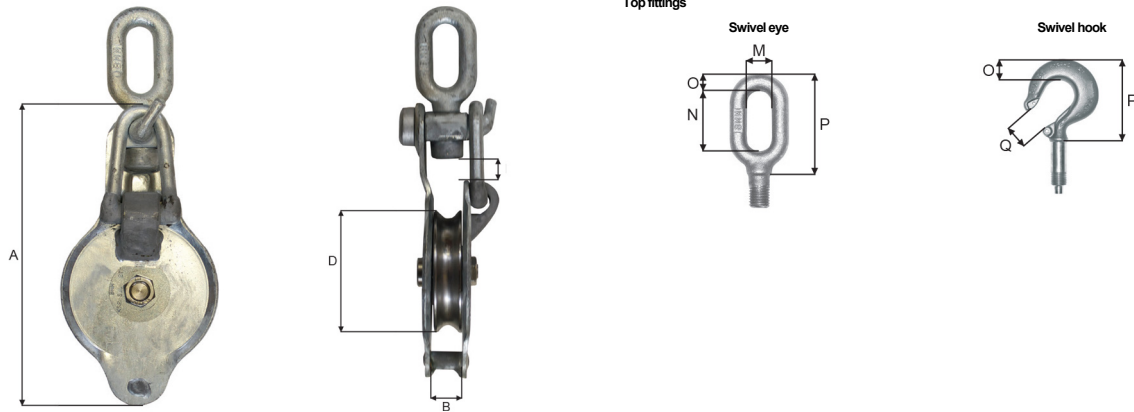

Stock code	Working Load Limit (ton)	Maximum load on head fitting (ton)	Test load (ton)	Dimensions (mm)				Maximum wire (mm)	Weight (kg)
				A	B	D	E		
KS2	2.0	4.0	8.0	225	24	110	23	18	3.7
KS3	3.0	6.0	12.0	300	28	150	30	18	7.5
KS4	4.0	8.0	16.0	330	35	185	33	22	13.5
KS6	6.0	12.0	24.0	378	41	210	35	24	19.4

Top fittings

Stock code	Swivel eye				Swivel hook		
	M (mm)	N (mm)	O (mm)	P (mm)	O (mm)	P (mm)	Q (mm)
KS2	23	55	16	94	25	94	28
KS3	26	66	20	110	30	105	30
KS4	35	68	23	134	38	132	38
KS6	40	90	26	153	46	170	46

All snatch blocks must be closed during operation.

BMM-Blocks must be ordered with one of the following:

- 1** Ball bearing, greaseable; KS1, KS2 sealed ball bearings; KS3, KS4, KS6 greaseable ball bearings.
- 0** Bronze bushing. All bronze bushings are greaseable.

And one of the following.

- E** Swivel eye.
 - K** Swivel hook.
 - G** Galvanised is the standard finish.
- On order add letter, e.g. KS2-1EG.

Against extra charge all blocks are available with:

- C** Tested with certificate.
 - P** Split pin at locking device.
 - H** Flame hardened sheave.
- On order add letter, e.g. KS2-1EGP.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.