



TRAWL BLOCKS

K*-2A BMM

- Galvanised.
- Rollerbearing.
- Thrust bearing on top.

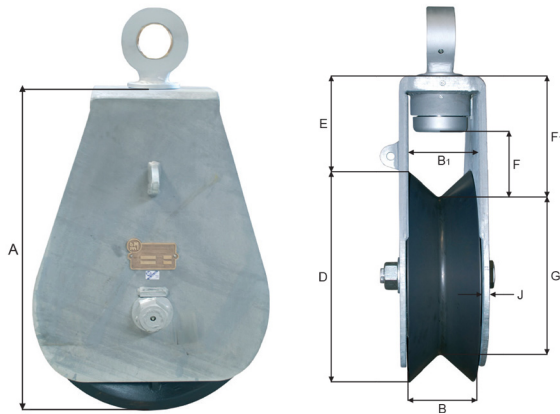

Top fittings

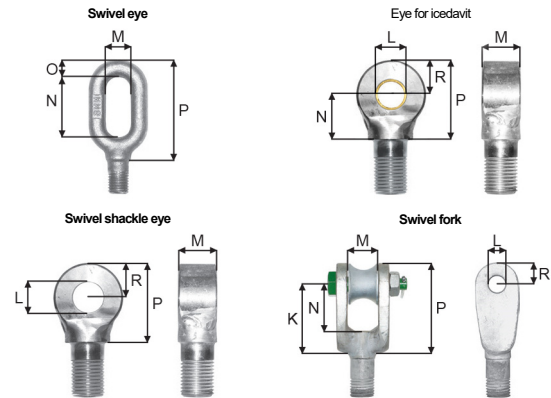

Stock code	Working Load Limit (ton)	Maximum load on head fitting (ton)	Test load (ton)	Dimensions (mm)												Maximum wire (mm)	Weight (kg)
				A	B	B ₁	D	E	F	F ₁	G	J					
*K370-2A	13.0	26.0	52.0	580	140	140	370	260	120	245	285	12	28			28	115.0
*K400-2A	15.0	30.0	55.0	670	180	180	400	245	180	305	300	15	28			28	185.0
KH400-2A	20.0	40.0	70.0	685	180	180	400	285	180	334	300	20	28			28	225.0
K500-2A	20.0	40.0	70.0	785	180	180	500	285	185	345	380	20	30			30	275.0
K600-2A	30.0	60.0	95.0	910	180	180	600	310	190	380	480	20	32			32	360.0
K650-2A	30.0	60.0	95	985	240	220	650	335	225	415	500	20	34			34	500.0
KH650-2A	40.0	80.0	120	975	240	220	650	337	225	415	500	20	38			38	530.0
K800-2A	40.0	80.0	120	1125	240	220	800	325	240	440	600	20	38			38	750.0
KH800-2A	60.0	120.0	165	1200	240	230	800	400	242	500	600	25	40			40	895.0
K1000-2A	60.0	120.0	165	1485	260	240	1000	485	270	570	825	25	44			44	1320.0
K1200-2A	70.0	140.0	195	1640	260	240	1200	440	264	530	1020	30	44			44	1750.0

Top fittings

Stock code	Swivel eye				Swivel fork				Swivel shackle eye				Eye for icedavit				Eye for icedavit weight (kg)	
	M (mm)	N (mm)	O (mm)	P (mm)	K (mm)	L (mm)	M (mm)	N (mm)	R (mm)	P (mm)	L (mm)	M (mm)	R (mm)	P (mm)	L (mm)	M (mm)	N (mm)	
K370	70	110	50	220	165	39	70	103	50	215	51	72	60	145	-	-	-	-
K400-2A	70	110	50	225	195	51	85	115	65	260	51	72	60	145	78	70	190	85
KH400-2A	70	110	50	225	195	51	85	115	65	260	51	72	60	145	78	78	190	85
K500-2A	75	140	55	280	195	51	85	115	65	260	58	80	70	160	78	78	190	85
K600-2A	100	155	70	335	230	58	90	140	75	305	-	-	-	-	106	108	240	100
K650-2A	100	155	70	335	230	58	90	140	75	305	-	-	-	-	106	108	240	100
KH650-2A	100	155	70	335	230	58	90	140	75	305	-	-	-	-	106	108	260	110
K800-2A	100	190	70	335	250	81	90	180	90	340	-	-	-	-	106	108	260	110
KH800-2A	100	190	70	335	250	81	90	180	90	340	-	-	-	-	125	168	300	130
K1000-2A	-	-	-	-	-	-	-	-	-	-	-	-	-	-	125	168	300	130
K1200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	125	168	304	130

*are only supplied with full sideplates.

Blocks must be ordered with one of the following:

- E** Swivel eye.
 - F** Swivel fork.
 - S** Swivel shackle eye.
 - I** Eye for icedavit.
 - G** Galvanised is the standard finish.
- On order add letter, e.g. K600-2AEG.

Against extra charge all blocks are available with:

- C** Tested with certificate.
 - H** Flame hardened sheave.
- On order add letter, e.g. K600-2AEGC.

Individual sheaves, bushing and pins can be ordered, contact African Maritime Services (PTY) Ltd. for further information.