




CONNECTORS

LOK-A-LOY® 10 ALLOY CONNECTING LINK

- Suitable for use with both Grade 80 and Grade 100 chain.
- Individually Proof Tested at 2-1/2 times Working Load Limit with certification.
- Locking system that provides for simple assembly and disassembly - no special tools needed.
- 25% stronger than Grade 80.
- Meets ASTM A-952-02 standards for Grade 100 chain fittings.
- Forged Alloy Steel - Quenched and Tempered.
- Sizes 9/32 through 1 inch are fatigue rated.
- "Look for the Platinum Color - Crosby Grade 100 Alloy Products."
- For further information and guidance refer to the latest Crosby catalogue available at www.thecrosbygroup.com

Crosby®

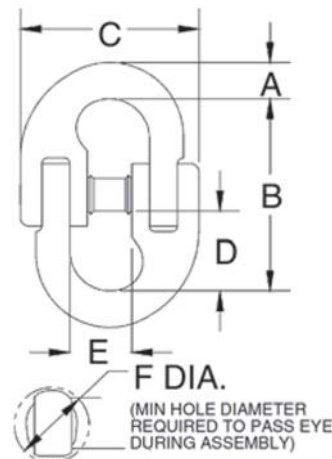

Chain size (mm)	(in.)	Stock code	Std. package quantity	Weight each (kg)	Working Load Limit (t)*	Dimensions (mm)					
						A	B	C	D	E	F
7	9/32 (1/4)	XCRA1337-07	60	0.12	2.0	9.7	49.3	48.3	20.6	17.5	14.5
8	5/16	XCRA1337-08	50	0.16	2.5	9.40	59.7	52.6	25.1	18.3	16.3
10	3/8	XCRA1337-10	40	0.34	4.0	12.2	68.6	62.7	28.4	22.9	19.8
13	1/2	XCRA1337-13	12	0.73	6.8	17.3	87.6	84.1	36.6	28.4	24.6
16	5/8	XCRA1337-16	10	1.30	10.2	20.6	105	99.1	43.7	34.3	29.0
20	3/4	XCRA1337-20	1	2.26	16.0	23.6	118	118	53.1	40.4	32.5
22	7/8	XCRA1337-22	1	3.41	19.4	26.9	140	143	58.7	50.0	36.6
25	1	XCRA1337-25	1	5.00	27.1	31.0	152	157	63.5	56.4	47.8
32	1-1/4	XCRA1337-32	1	9.25	41.0	38.1	189	194	78.5	64.3	55.6

* Ultimate load is 4 times the Working Load Limit. For Grade 6 LOK-A-LOY® see Crosby catalogue www.thecrosbygroup.com