




SHACKLES

G-4169 BOW SQUARE SUNKEN HOLE SCREW PIN TRAWLING SHACKLES

- Material: bow and pin high tensile steel, Grade 6, quenched and tempered
- Safety Factor: MBL equals 6 x WLL
- Standard: EN13889 and meets performance requirements of US Fed. Spec. RR-C-271, Grade A
- Finish: hot dipped galvanized
- Certification: at no extra charges this product can be supplied with a works certificate, 3.1 material certificate, manufacturer test certificate and/or EC Declaration of Conformity.
- Note: key for unscrewing the pin must be ordered separately.

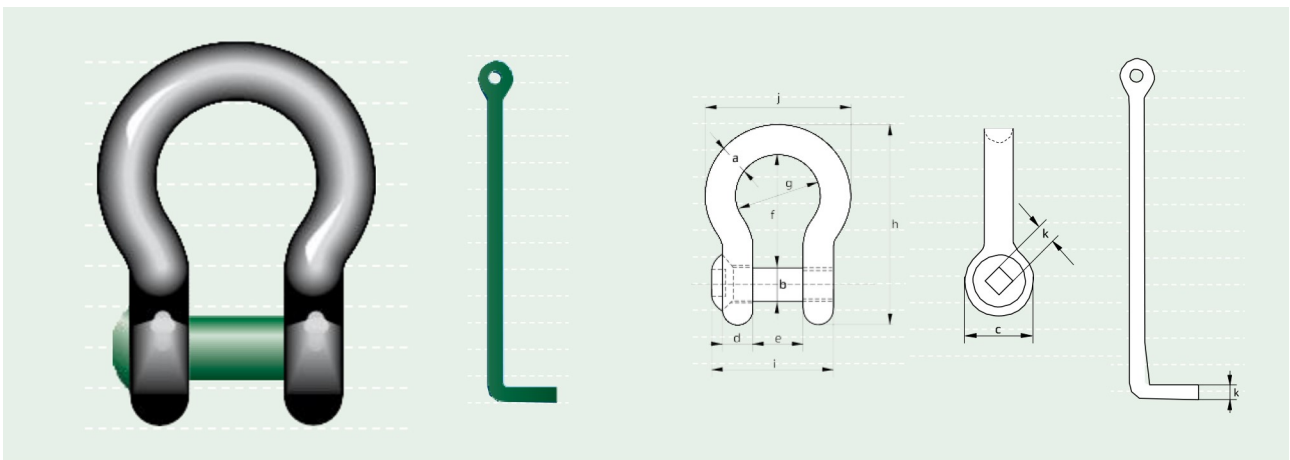

Working Load Limit (tons)	Stock code	Weight each (kg)	Dimensions (mm)										
			A	B	C	D	E	F	G	H	I	J	K
2	SHABEHGP12	0.3	13.5	16.0	34.0	13.0	22.0	51.0	32.0	89.0	51.0	58.0	11.0
3.25	SHABEHGP16	0.6	16.0	19.0	40.0	16.0	27.0	64.0	43.0	110.0	63.0	75.0	11.0
4.75	SHABEHGP20	1.0	19.0	22.0	46.0	19.0	31.0	76.0	51.0	129.0	74.0	89.0	11.0
6.5	SHABEHGP22	1.5	22.0	25.0	52.0	22.0	36.0	83.0	58.0	144.0	85.0	102.0	13.0
8.5	SHABEHGP25	2.2	25.0	28.0	59.0	25.0	43.0	95.0	68.0	164.0	99.0	118.0	13.0
9.5	SHABEHGP28	3.1	28.0	32.0	66.0	28.0	47.0	108.0	75.0	185.0	110.0	131.0	17.0
12	SHABEHGP32	4.2	32.0	35.0	72.0	32.0	51.0	115.0	83.0	201.0	122.0	147.0	17.0
13.5	SHABEHGP35	5.6	35.0	38.0	80.0	35.0	57.0	133.0	92.0	227.0	135.0	162.0	17.0
17	SHABEHGP40	7.4	38.0	42.0	88.0	38.0	60.0	146.0	99.0	249.0	145.0	175.0	17.0