





WIRE ROPE END FITTINGS

G-450 RED-U-BOLT® CLIPS

- Each base has a Product Identification Code (PIC) for material traceability, the name CROSBY or CG, and a size Forged into it.
- Based on the catalog breaking strength of wire rope, Crosby wire rope clips have an efficiency rating of 80% for 3mm through 22mm sizes, and 90% for sizes 24mm through 90mm.
- Entire Clip is galvanized to resist corrosive and rusting action.
- Sizes 3mm through 62mm and 75mm have forged bases.
- All Clips are individually bagged or tagged with proper application instructions and warning information.
- Clip sizes up through 38mm have rolled threads.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these wire rope clips meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Look for the Red-U-Bolt®, your assurance of Genuine Crosby Clips.

Crosby®

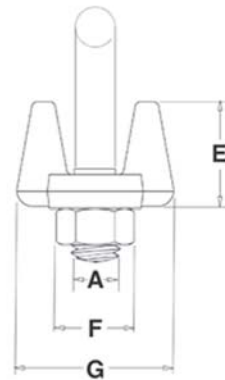

Rope size (mm)	(in.)	Stock code	Std. package quantity	Weight/100 (kg)	Dimensions (mm)							
					A	B	C	D	E	F	G	H
3-4*	1/8*	XCRG450/4	100	2.72	5.6	18.3	11.2	11.9	10.4	9.65	20.6	23.9
5*	3/16*	XCRG450/5	100	4.54	6.35	24.6	14.2	15	12.7	11.2	23.9	29.5
6-7	1/4	XCRG450/7	100	8.62	7.85	26.2	12.7	19.1	16.8	14.2	30.2	36.6
8	5/16	XCRG450/8	100	12.7	9.65	35.1	19.1	22.4	18.3	17.5	33.3	42.9
9-10	3/8	XCRG450/9	100	21.8	11.2	38.1	19.1	25.4	23.1	19.1	41.4	49.3
11	7/16	XCRG450/11	50	35.4	12.7	47.8	25.4	30.2	26.2	22.4	46	58
12-13	1/2	XCRG450/12	50	36.3	12.7	47.8	25.4	30.2	28.7	22.4	48.5	58
14-15	9/16	XCRG450/14	50	49.4	14.2	57	31.8	33.3	31	23.9	52.5	63.5
16	5/8	XCRG450/16	50	49.9	14.2	60.5	31.8	33.3	34	23.9	52.5	63.5
18-20	3/4	XCRG450/18	25	64	15.7	70	36.6	38.1	35.8	26.9	57	72
22	7/8	XCRG450/22	25	96	19.1	79	41.1	44.5	40.4	31.8	62	80.5
24-26	1	XCRG450/24	10	114	19.1	89	46	47.8	45.2	31.8	67	88
28-30	1-1/8	XCRG450/28	10	128	19.1	98.5	51	51	48.5	31.8	71.5	91
32-34	1-1/4	XCRG450/32	10	199	22.4	108	54	59.4	55.5	36.6	79.5	105
36	1-3/8	XCRG450/36	10	200	22.4	118	58.5	59.4	58.5	36.6	79.5	106
38	1-1/2	XCRG450/38	10	247	22.4	125	60.5	66.5	62	36.6	86.5	113
41-42	1-5/8	XCRG450/41	Bulk	319	25.4	135	66.5	70	67.5	41.4	92	121
44-46	1-3/4	XCRG450/44	Bulk	424	28.7	146	70	77.5	74.5	46	97	134
48-52	2	XCRG450/48	Bulk	590	31.8	164	76	86	77	51	113	149
56-58	2-1/4	XCRG450/56	Bulk	726	31.8	181	81	98.5	81	51	114	162
62-65	2-1/2	XCRG450/62	Bulk	862	31.8	195	87.5	105	93.5	51	119	168
** 68-72	** 2-3/4	XCRG450/68	Bulk	1043	31.8	211	90.5	111	124	51	127	175
75-78	3	XCRG450/75	Bulk	1406	38.1	233	98.5	121	119	60.5	149	194
** 85-90	** 3-1/2	XCRG450/85	Bulk	1814	38.1	273	114	140	152	60.5	157	213

* Electro-plated U-Bolt and Nuts. **70mm and 89mm base is made of cast steel.