




WIRE ROPE END FITTINGS

S-423T SUPER TERMINATOR™

- The 423T wedge socket terminations have a minimum efficiency rating on most high performance, high strength, compacted strand, rotation resistant wire ropes of 80% based on the catalog breaking strength of the various ropes.**
- Design eliminates the difficulty of properly seating the wedge with high performance wire rope into a wedge socket termination.
- Proper application of the Super TERMINATOR eliminates the “first load” requirement of conventional wedge socket terminations.
- S-423TW Wedge Kit can be retrofitted onto existing Crosby S-421T TERMINATOR wedge sockets.
- Wedge and accessories provided with a zinc finish.
- Meets the performance requirements of EN13411-6:2003.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these sockets meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- US Patent 8,375,527 B1.
- Basket is cast steel and individually magnetic particle inspected.
- Pin diameter and jaw opening allows wedge and socket to be used in conjunction with closed swage and spelter sockets.
- Secures the tail or “dead end” of the wire rope to the wedge, thus eliminates loss or “punch out” of the wedge.
- Eliminates the need for an extra piece of rope, and is easily installed.
- The TERMINATOR® wedge eliminates the potential breaking off of the tail due to fatigue.
- The tail, which is secured by the base of the clip and the tension device, is left undeformed and available for reuse.
- **Available with Bolt, Nut, and Cotter Pin.**

Crosby®

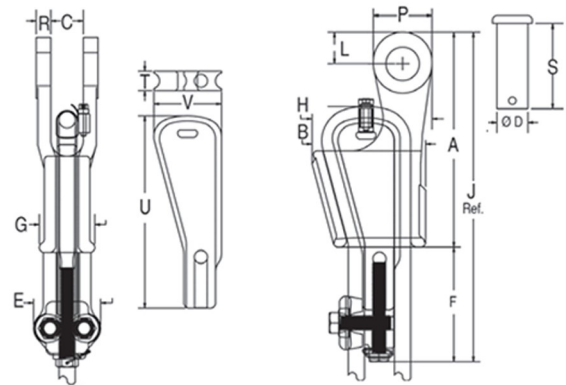

Rope size (mm) (in.)	Stock code	Dimensions (mm)															
		A	B	C +/- 2.29	D	E	F	G	H	J*	L	P	R	S	T	U	V
14-16 5/8	XCRS423T16	210	114	31.8	30.2	76.2	103	54.1	117	313	31.0	57.2	14.2	82.6	19.1	175	66.0
18-19 3/4	XCRS423T19	251	132	38.1	35.1	82.6	122	62.0	136	373	35.6	66.5	16.8	92.2	22.4	194	76.7
20-22 7/8	XCRS423T22	286	149	44.5	41.4	96.8	146	68.3	156	431	42.4	79.5	19.1	109	25.4	241	88.1
24-26 1	XCRS423T26	325	167	50.8	50.8	96.8	146	74.7	179	471	51.1	95.3	22.4	119	28.7	264	97.0
28 1-1/8	XCRS423T28	365	176	57.2	57.2	102	174	85.9	198	539	57.4	108	25.4	138	31.8	300	107
30-32 1-1/4	XCRS423T32	415	219	66.5	63.5	114	197	90.7	238	612	59.4	114	26.9	168	35.1	352	148

* Nominal NOTE: For intermediate wire rope sizes, use next larger size socket. The S-423T Super TERMINATOR wedge is designed to be assembled only into the Crosby S-421T TERMINATOR socket body. IMPORTANT: The S-423TW for sizes 14mm through 28mm will fit respective size standard Crosby S-421T basket. The 30-32mm S-423TW will only fit the Crosby S-421T 30-32mm basket marked with “TERMINATOR”.