

SHACKLES - Safety Type

Green Pin® Bow Shackle BN

Standard bow shackle with safety bolt

Product details

Productcode

G-4163

Material

bow and pin high tensile steel,
Grade 6, quenched and tempered

Safety factor

MBL equals 6 x WLL

Finish

hot dipped galvanized


Temp. range

-40°C up to +200°C

Certification

Standard

EN 13889 and meets performance requirements of US Fed. Spec. RR-C-271, Type IVA, Class 3, Grade A. From 2 t and upward these shackles comply with ASME B30.26

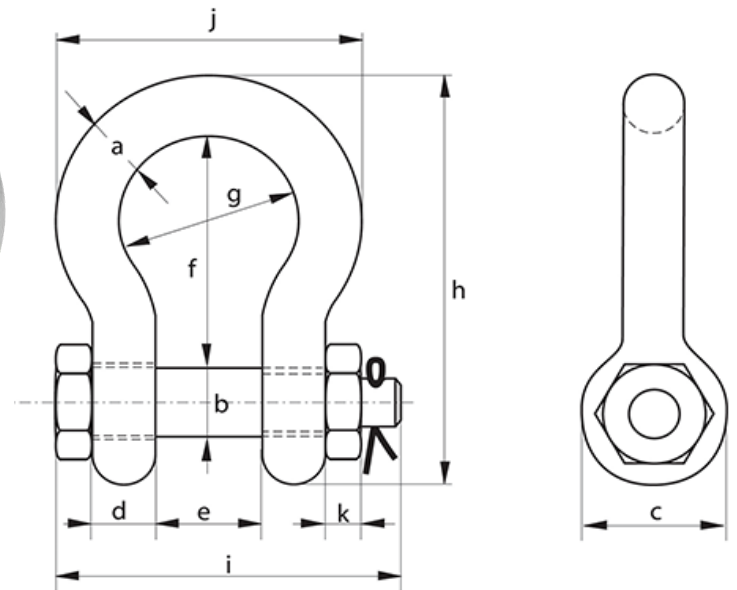

Article code	working load limit (ton)	A	B	C	D	E	F	G	H	I	J	K	Net weight (KG)
GPGHMB06	0,5	7	8	16	7	12	29	20	48	42	34	4	0.06
GPGHMB08	0,75	9	10	20	9	13,5	32	22	56	50	40	5	0.11
GPGHMB10	1	10	11	23	10	17	37	26	64	60	46	8	0.15
GPGHMB11	1,5	11	13	25	11	19	43	29	73	67	51	11	0.22
GPGHMB13	2	13,5	16	34	13	22	51	32	90	80	59	13	0.42
GPGHMB16	3,25	16	19	40	16	27	64	43	110	98	75	17	0.74
GPGHMB19	4,75	19	22	46	19	31	76	51	129	115	89	19	1.18
GPGHMB22	6,5	22	25	52	22	36	83	58	144	130	102	22	1.77
GPGHMB25	8,5	25	28	59	25	43	95	68	164	150	118	25	2.58
GPGHMB28	9,5	28	32	67	28	47	108	75	186	166	131	27	3.66
GPGHMB32	12	32	35	73	32	51	115	83	201	184	147	30	4.91
GPGHMB35	13,5	35	38	79	35	57	133	92	227	197	162	33	6.54
GPGHMB38	17	38	42	88	38	60	146	99	249	202	175	19	8.19
GPGHMB45	25	45	50	104	45	74	178	126	300	243	216	23	14.0
GPGHMB50	35	50	57	112	50	83	197	138	332	269	238	26	18.8
GPGHMB57	42,5	57	65	132	57	95	222	160	378	301	274	29	28.3
GPGHMB65	55	65	70	145	65	105	260	180	433	329	310	32	39.6
GPGHMB75	85	75	83	167	75	127	330	190	530	381	340	39	62

